


## Overview

---

The Yamaha MY8-AE96 is an optional digital I/O card for compatible Yamaha digital mixing consoles and signal processors. It provides eight inputs and eight outputs for 24-bit, 44.1/48/88.2/96 kHz uncompressed AES/EBU compliant digital audio.

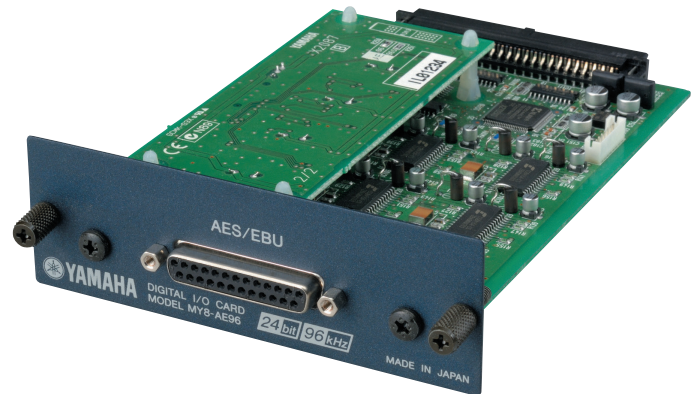

## Features

---

- 24bit resolution, 96kHz compatible 8-in/8-out AES/EBU interface
- 1 x D-sub 25 pin connector
- Dimensions: 120mm x 40mm x 176 mm (4.7" x 1.6" x 6.9")

## Specifications


### General Specifications

Channel Count	96kHz compatible 8IN / 8OUT
Format	AES/EBU
Sampling Frequency	44.1/48/88.2/96kHz
Resolution	24bit
Connector	1 x D-sub 25 pin connector

### Pin Assignment

Signal		Data In Ch				Data Out Ch				Open	GND
		1-2	3-4	5-6	7-8	1-2	3-4	5-6	7-8		
Pin	Hot	1	2	3	4	5	6	7	8	9, 11	10, 12, 13, 22, 23, 24, 25
	Cold	14	15	16	17	18	19	20	21		

## Dimensions

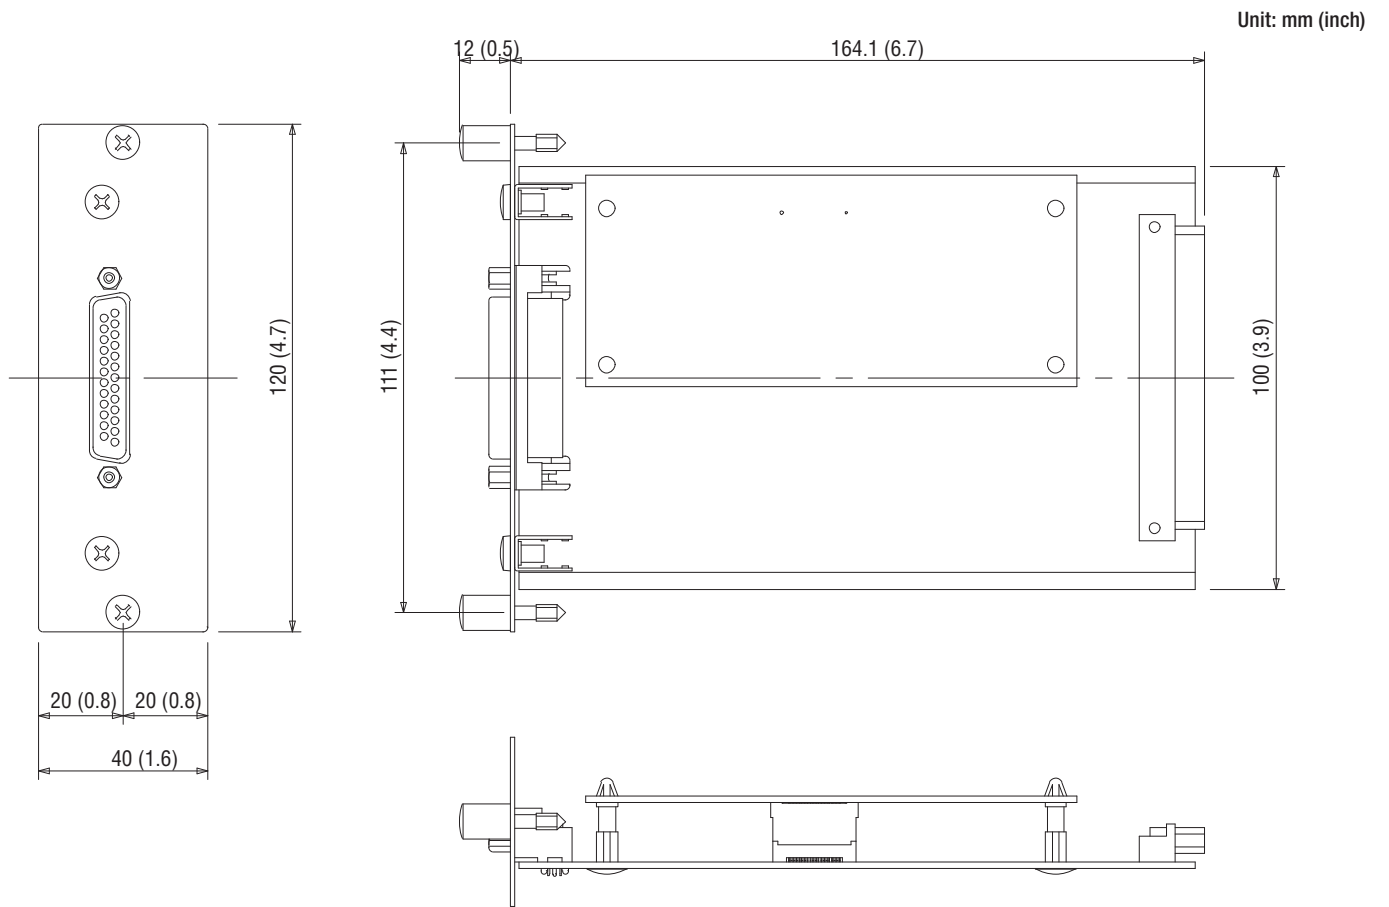

## Architectural and Engineering Specifications

---

The Yamaha MY8-AE96 shall be an optional digital I/O card for compatible Yamaha digital mixing consoles and signal processors. It shall provide eight inputs and eight outputs for 24-bit, 44.1/48/88.2/96 kHz uncompressed AES/EBU compliant digital audio. One D-sub 25-pin connectors shall be provided for input and output connection. Dimensions shall be 120 (W) x 40 (H) x 176 (D) mm.

\*All information subject to change without notice.

\*All trademarks and registered trademarks are property of their respective owners.

Created in March, 2017

**YAMAHA CORPORATION**  
P.O.BOX 1, Hamamatsu Japan  
[www.yamahaproaudio.com](http://www.yamahaproaudio.com)