

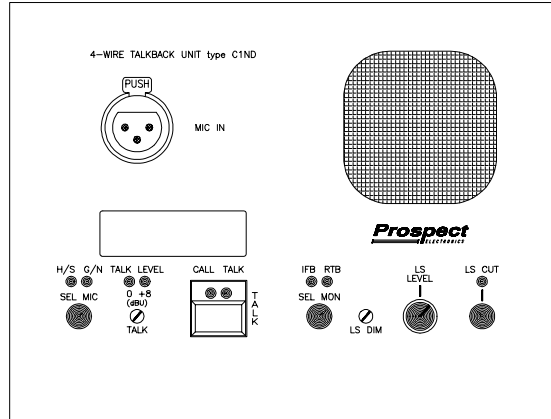



DESK-TOP 4-WIRE BOX type C1ND

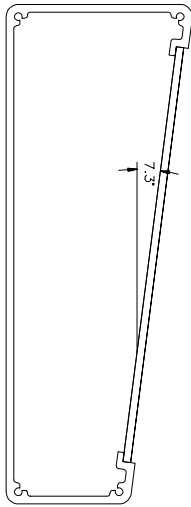

C1ND TOP PANEL

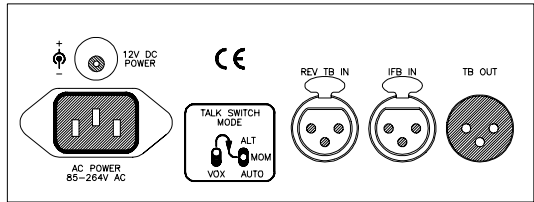

C1ND REAR PANEL



C1ND FRONT PANEL

FEATURES

1	Desk-top metal case with sloping top panel	11	TALK switch with selectable latch mode & VOX operation
2	XLR3 microphone socket with selectable phantom power	12	Adjustable TALKBACK output level
3	85-264V AC mains input on IEC connector	13	TALKBACK output peak level indicator (0dB & +8dB)
4	TALKBACK output on male XLR3 connector	14	Selectable monitoring of IFB or REV TB inputs
5	REVERSE TALKBACK input on female XLR3 connector	15	Signal presence (CALL) LED on selected input
6	IFB input on female XLR3 connector	16	LS LEVEL control & LS CUT switch
7	12V DC input on coaxial battery connector	17	LS DIM: adjustable, 0dB to OFF
8	HEADPHONE output on 6.4mm (1/4") jack	18	1.5 watt loudspeaker power (peak)
9	HEADSET input/output on female XLR5 connector	19	Pre-selectable startup mode for control panel functions
10	Separate gain adjustments for headset and stem mic's		

DESK-TOP 4-WIRE BOX type C1ND

BLOCK DIAGRAM

